



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T4S R8W

SEC 3 | SEC 2
SEC 10 | SEC 11

U.S.B.&M.

V-17




SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 52°06'26" W	30.75'
L2	N 76°12'45" E	50.47'
L3	S 59°46'41" W	15.39'

FOUND ORIGINAL
MARKED STONE AT
1/4 CORNER

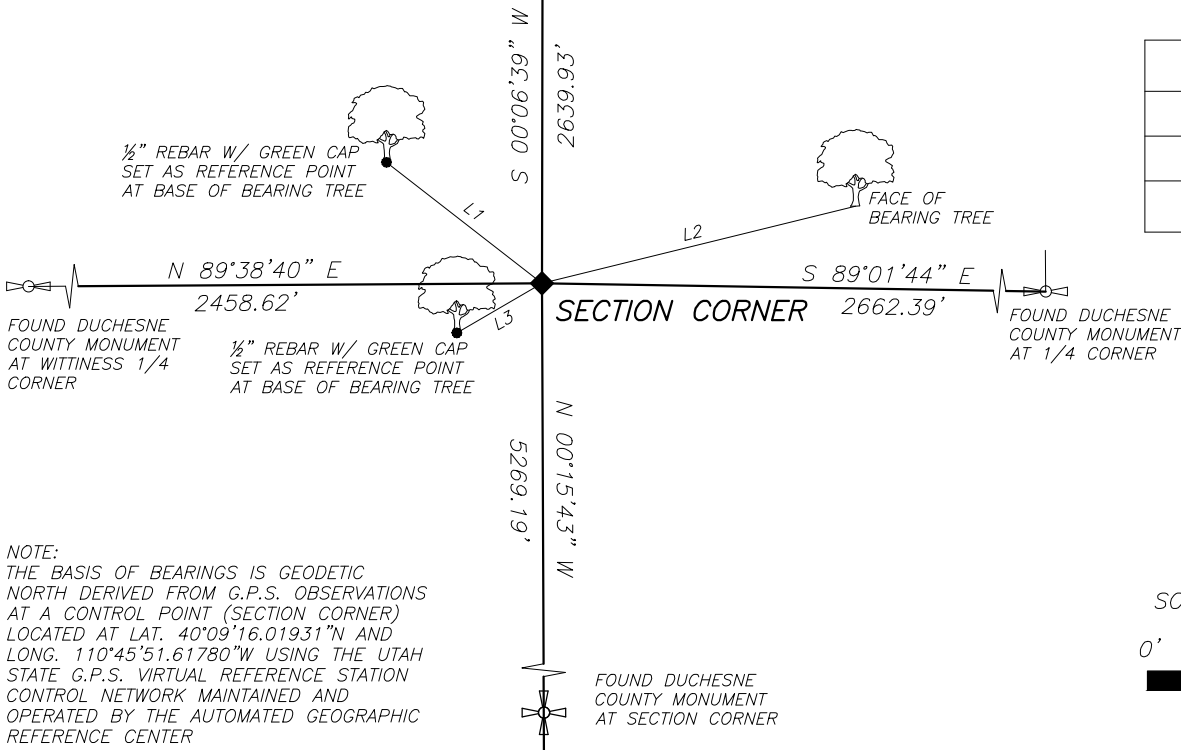

NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT (SECTION CORNER)
LOCATED AT LAT. 40°09'16.01931"N AND
LONG. 110°45'51.61780"W USING THE UTAH
STATE G.P.S. VIRTUAL REFERENCE STATION
CONTROL NETWORK MAINTAINED AND
OPERATED BY THE AUTOMATED GEOGRAPHIC
REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND AN ORIGINAL MARKED STONE AT THE
POSITION OF SECTION CORNER



PHOTO OF ORIGINAL MARKED STONE

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET REFERENCE POINTS AS SHOWN AND TIED
TO BEARING TREES AND ADJOINING CORNERS

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7225828.767
E: 1846036.825
NAVD88 EL: 6523.71'

LATITUDE: 40°09'16.01932" N
LONGITUDE: 110°45'51.61780" W
ELLIPSOID HEIGHT: 6470.31'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300040S0080W0_500600



PHOTO OF STONE FACING WEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 22 MAY'19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

